


# CF5D

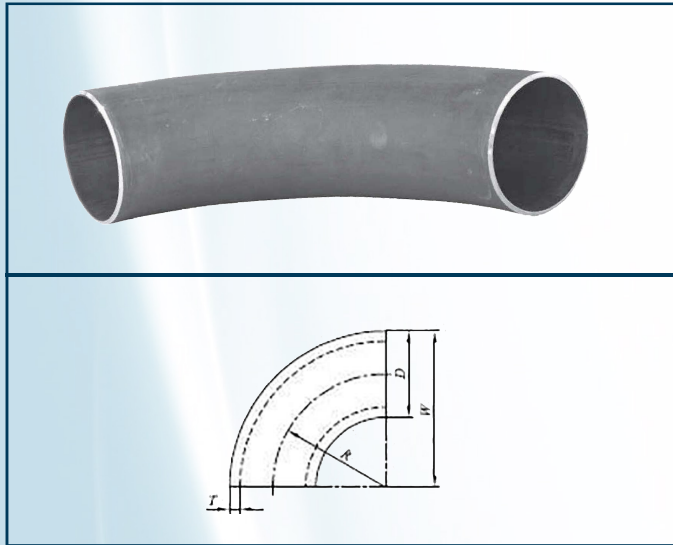

## CURVE SENZA SALDATURA

R=2,5D DIMA 5

EN 10253-2 - P235GH

Ø EST.MM OUTS. DIAM MM	SPESSORE THICKNESS	RAGGIO RADIUS	W	PESO TEORICO THEORETICAL WEIGHT KG
21,30	2,00	43	53	0,07
	2,90			0,09
	3,60			0,11
26,90	2,30	58	71	0,13
	2,90			0,16
	4,00			0,21
33,70	2,60	73	89	0,23
	3,60			0,31
	4,50			0,37
42,40	2,60	93	114	0,37
	3,60			0,50
	5,00			0,67
48,30	2,50	108	134	0,50
	3,60			0,67
	5,00			0,90
60,30	2,90	137	168	0,87
	4,00			1,18
	5,0			1,60
76,10	2,90	175	213	1,44
	5,00			2,41
	7,10			3,32
88,90	3,20	205	252	2,18
	5,60			3,71
	8,00			5,14

Ø EST.MM OUTS. DIAM MM	SPESSORE THICKNESS	RAGGIO RADIUS	W	PESO TEORICO THEORETICAL WEIGHT KG
101,60	3,60	235	286	3,25
	5,60			4,95
	8,00			6,89
114,30	3,60	270	327	4,17
	6,30			7,12
	8,80			9,71
139,70	4,00	330	400	6,94
	6,30			10,80
	10,00			16,60
168,30	4,50	390	474	11,10
	7,10			17,30
	11,00			26,10
219,10	6,30	510	619	26,50
	8,00			33,40
	12,50			51,00
273,00	6,30	650	786	42,30
	10,00			66,20
	12,50			82,00
323,90	7,10	770	932	67,50
	10,00			94,20
	12,50			117,00
355,60	8,00	850	1028	91,60
	10,00			114,00
	12,50			141,00
406,40	8,80	970	1173	132,00
	10,00			149,00
	12,50			185,00